

EZ-Trans



Spacious interior allows room to maneuver.

EZ-Trans™ Low Floor Bus

Key Features & Benefits

- Innovative rear wheel drive platform.
- Available on the International 3200-IM (Integrated Mobility) Chassis for rugged service.
- Air suspension for a smooth ride.
- Full OEM chassis warranty includes low-floor conversion.
- Steelguard construction for superior durability.
- Kneeling feature for EZ access.



Viewing window for increased visibility.



Flip seats add flexibility to floorplans.

STANDARD FEATURES

Chassis

- Tilt Steering Wheel/Cruise Control
- 270 Amp Alternator
- Automotive HVAC
- Power Brakes - 4 Wheel Anti-Lock
- Power Steering
- 245/70R/19.5 Radial Tires
- 5:1 Rear Axle Ratio
- Dual Cab Doors
- Super Engine Cooling
- Long-life Engine Coolant
- External Transmission Cooler
- Intermittent Windshield Wipers
- Pull-out Battery Tray

Conversion

- ADA Wheelchair Ramp
- ADA Entrance Light
- Multiplexed Electrical System
- Ceiling (Gray Vinyl)
- 12-Volt Electrical Panel
- Electric Passenger Entry Door w/Auto Reverse
- Exterior Body Panels (Painted White Galvanized Steel)
- Fiberglass Front Cap
- Fire Extinguisher (2 lb.)
- Flooring (Black Rubber)
- 5/8" Plywood Subfloor
- Insulation (Foamed)
- Interior Lighting (12-volt)
- Lights (Stepwell)
- Mirrors (Sideview)
- Modesty Panels (At Entry)
- Rear Steel Bumper
- Track Seating
- Rear Mud Flaps
- Rub Rails
- Rust Inhibitor Primer
- Stanchions (Stainless Steel)
- Steelguard Cage Construction
- Undercoating (Floor Frame)
- Wheelwells (Steel)
- Windows (Tinted "T"-Slider Type)
- Parking Brake Interlock
- Priority Seating Sign
- Wheelchair Location Sign
- Door Activated Entrance Lighting
- Driver's Seat (Air Ride)

OPTIONAL FEATURES

Air Conditioning Rear

- 55,000 BTU Dual Compressor*
- 67,000 BTU Dual Compressor*
- 75,000 BTU Dual Compressor*
- Winter Guard Compressor Cover
- Roof Mounted Condenser Heater — Rear
- 35,000 BTU
- 65,000 BTU
- Heat Circulation Pump
- Ramp Heater

Electrical

- Master Disconnect Switch
- Page System
- Deluxe AM/FM CD-Digital Radio w/Page
- Circuit Breakers in lieu of Fuses

- Side Directional Lights
- Rear Center Brake Light
- Defroster Fan
- LED Lights
- Video Packages
- Clock
- Two-way Radio Prep

Exterior

- Stainless Steel Wheel Inserts
- Deluxe Wheel Covers
- FRP Exterior Panels
- Door (Rear Exit)
- Front Mud Flaps
- Paint/Decals
- Shock Absorbing Rear Bumper
- Rear Step Bumper
- Destination Signs
- Windows ("T"-Slider Type)
- Heated Remote Mirrors
- "LED" Lights
- Fiberglass Step Covers
- Lower Window Passenger Door

Flooring

- 3/4" Plywood Floor
- Full Rubber Floor
- Underbelly (Steel)
- Underbody Urethane Insulation
- Standee Line

Interior

- Safety Signs
- Fare Box
- Front Storage
- Overhead Parcel Racks
- Luggage Racks
- Passenger Signal (Pull Cord or Tape)

Mobility Package


- Wheelchair Tiedowns
- Storage Pouches

Safety Equipment


- Crossview Mirror
- Driver's Barrier
- Escape Hatch
- Fresnel Lens
- Ceiling Mounted Hand Rails
- Backup Alarm
- Fire Extinguisher (5 lb.)
- First Aid Kit (13 Units)
- Reflector Kit
- Right Hand Grab Handle
- Interior Mirror (6" x 16")
- Fire Extinguisher (10 lb.)
- First Aid Kit (24 Units)
- Stanchion w/Modesty Panel
- Stanchion Padding
- White Standee Line

Seating


- Armrest
- Padded Grab Rails
- Seat Belts
- Low Back Basic Bench
- Low Back Contour
- Mid-High Rigid
- Mid-High Recliner
- High-Back Rigid
- High-Back Recliner
- Flip Seats
- Side Slider

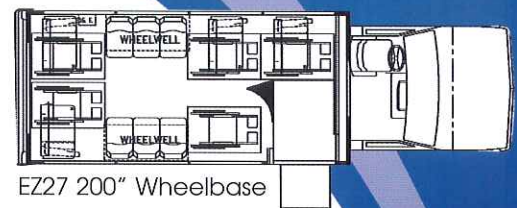


EZ27 200" Wheelbase

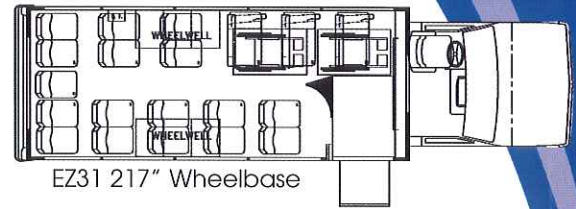

EZ31 217" Wheelbase

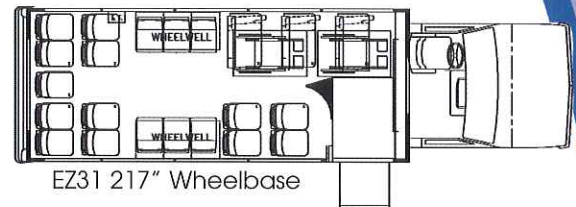

EZ31 217" Wheelbase

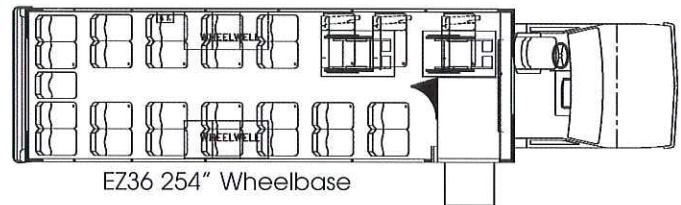

EZ36 254" Wheelbase

EZ-Trans™ Specification

Description	EZ27	EZ29	EZ31	EZ34	EZ36
Overall length w/std. bumpers	324"	348"	366"	408"	436"
Add for energy absorbing bumper - rear	5"				
Chassis wheelbase	International 3200-IM 200", 217" & 254"				
GVWR	23,500 - 25,600 lbs.				
Exterior height to skin	111"				
• Add for roof mount A/C	9 1/2"				
• Add for "closed" vent	4 1/2"				
• Add for "open" vent	7 1/2"				
Maximum exterior width	102" Excluding Mirrors				
Interior height at center of aisle (minimum)	72" @ center aisle @ rear of bus				
Interior width at floor	96 1/2"				
width at 24" above floor	97"				
Clear passenger door opening	37" x 75"				
Ground to floor height	14 1/2"				
• with kneeling activated	12" max.				
Aisle width between std. seats	21" min.				

General Coach America, Inc. reserves the right to make changes at anytime on price, colors, materials, equipment, design specifications and models. Dealers will provide up-to-date specification and options available at an extra cost.



GENERAL COACH
America, Inc.

Thor Industries Commercial Bus Division

275 Graham Road
Imlay City, MI 48444

Phone: 800.331.5761 • www.generalcoachamerica.com



A Quality GM Chassis Converter